

1-10V LED Dimming Driver

0-72W...144W 6A 12-24Vdc

- Dimming interface: 0-10V, 1-10V, 10V PWM or push button
- PWM digital dimming, no alter LED color rendering index.
- Dimming range: 0-100%, LED start at 0.1% possible.
- Max. current output: 6A.
- Full protective plastic housing.
- Suitable for indoor environments.




Main Characteristics


Dimming Interface:	0-10V, 1-10V, 10V PWM or push button
Input Voltage:	12-24Vdc
Output Voltage:	12-24Vdc
Output	6A×1CH
Max. Output Power:	0-72W...144W
Dimming Range:	0-100%, LED start at 0.1% possible


Working Temperature:	-30°C~55°C
Product Size:	L135×W30×H20(mm)
Package Size:	L140×W34×H23(mm)
Weight(G.W.):	65g

Dimensions

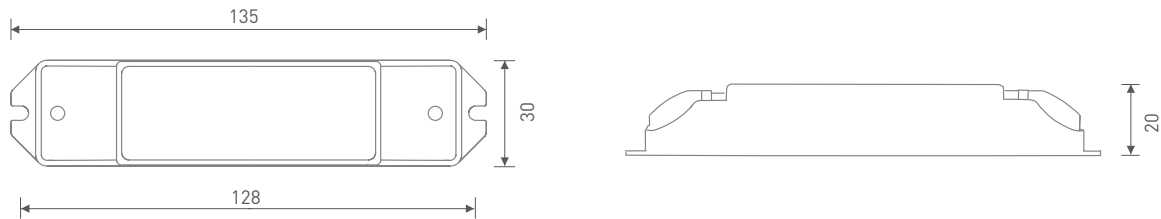


System Connection Diagram:

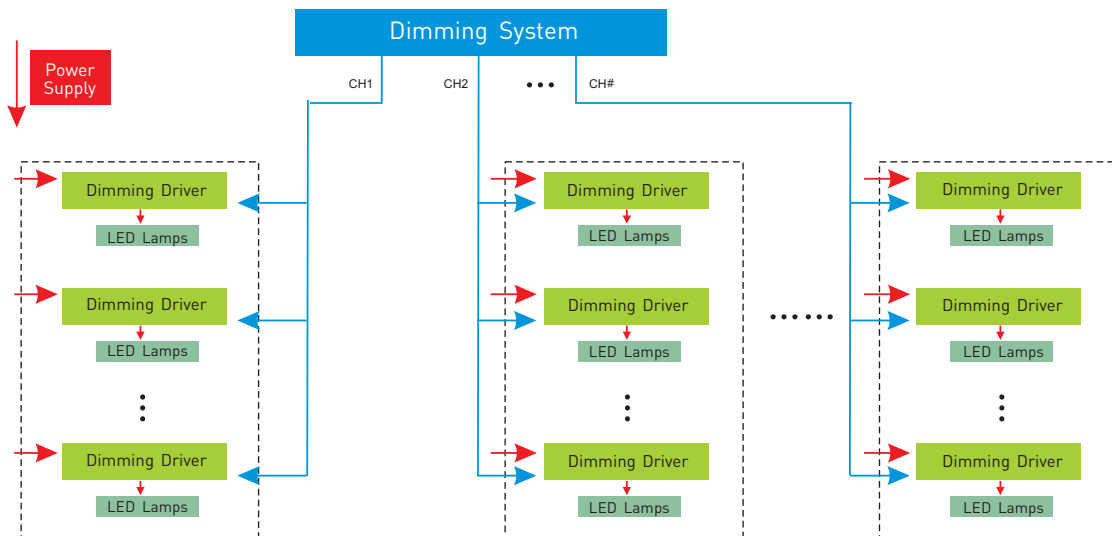

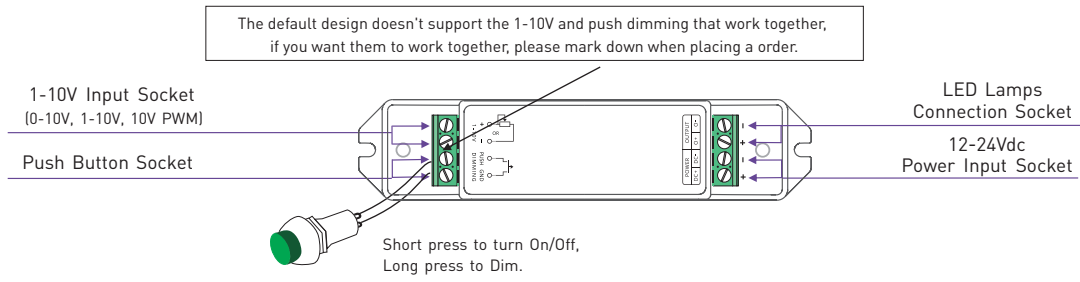

12V lamp connected, loads 0~72W(12V).

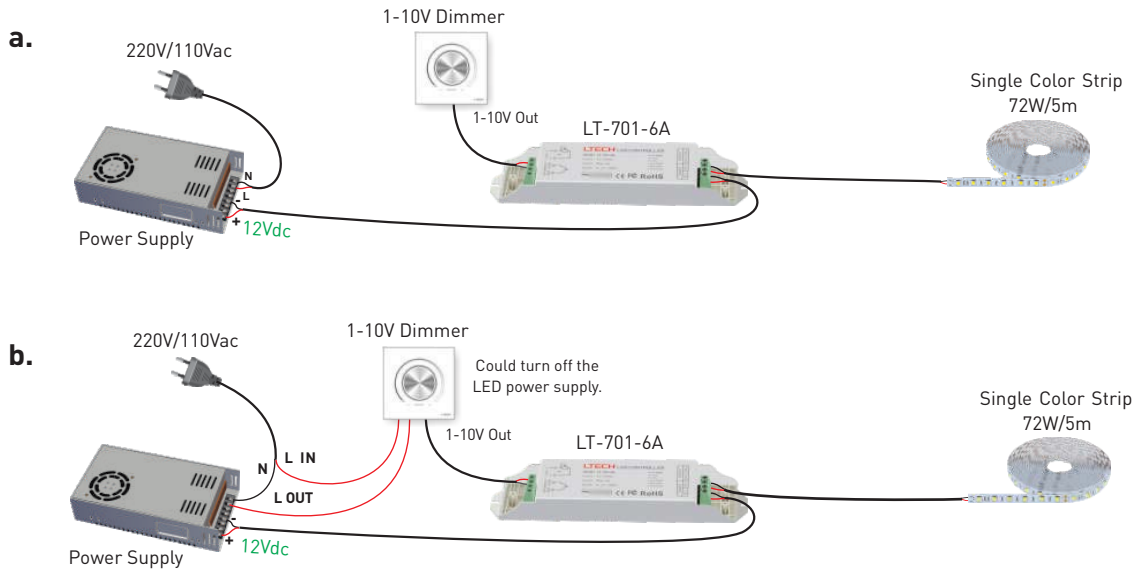

24V lamp connected, loads 0~144W(24V).

